

KTX-4 is a general-purpose ribbon used for a wide variety of labels. It provides excellent print quality and high density at low energy levels, and high print speeds of up to 10"/sec. It is the most economical ribbon for a broad range of printers and materials.

RECOMMENDED APPLICATION



PRINT HEAD TYPE

FLAT EDGE

RECOMMENDED SUBSTRATES

Uncoated paper	★★★★★
Coated paper	★★★★★
Gloss paper	★★★★★
Synthetic paper	★★★★★
Tag paper	★★★
Various types of film	★★
PET label	★★
Care label	—

RIBBON SPECIFICATION

Back coating	Silicon based
Film Thickness	4.5 ± 0.3μ
Ribbon Thickness	7.8 ± 0.5μ
Ink Type	WAX
Ink Melting Point	70°C

TYPICAL COMPLIANCE

- REACH-SVHC Free : EU REACH Regulation(1907/2006) Substance of Very High Concern(SVHC)
- RoHS : RoHS Directive(2002/95/EC)Conformity
- Halogen Free : Chlorine Content : 900ppm or less Bromine Content : 900ppm or less Chlorine and Bromine Total Contents : 1500ppm or less
- TSCA : Premanufacture Notification(PMN) Conformity
- Food Contact : Compliant with the European Directive 1935/2004/EC

GENERAL CO.,LTD. www.general.co.jp/english/

Tokyo Head Office: 1-3-6 Nishikanda, Chiyoda-ku, Tokyo 101-0065 Phone: +81-3-5283-8640


[China] Unit. C 3F, Zao-Fong Universe Building, No. 1800 Zhong Shan Xi Road, Shanghai, China Phone: +86 (0) 21 6440 1196

[Malaysia] Lot 4298-4300 Sg. Choh Industrial Area 48000 Rawang, Selangor, Malaysia Phone: +60-3-6099-9000

[USA] 601 N. Parkcenter Drive, Suite 106 Santa Ana, CA 92705 Phone: +1 657-236-7312

[Italy] Via Giacomo Leopardi, 29 20123 Milan Italy Phone: +39 2-4548-6203

SENSITIVITY

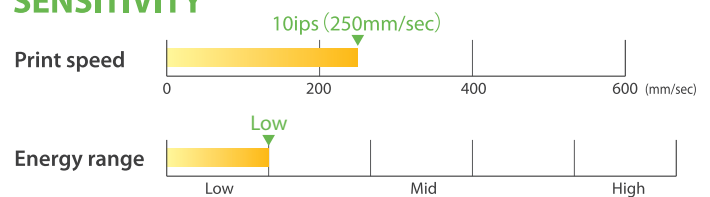

RESISTANCE

