

SD100(M)

RESIN SD100 (M)

SD100(M) can print on a variety of media at low energy levels.
Its print energy level is close to that of wax-resin ribbons,
and has superior resistance to scratching.

RECOMMENDED APPLICATION



PRINT HEAD TYPE

FLAT EDGE

RECOMMENDED SUBSTRATES

Uncoated paper	—
Coated paper	★ ★ ★
Gloss paper	★ ★ ★
Synthetic paper	★ ★ ★ ★ ★
Tag paper	★ ★ ★
Various types of film	★ ★ ★ ★ ★
PET label	★ ★ ★ ★ ★
Care label	—

RIBBON SPECIFICATION

Back coating	non-Silicon based
Film Thickness	4.5 ± 0.3μ
Ribbon Thickness	8.0 ± 0.5μ
Ink Type	RESIN
Ink Melting Point	80°C

TYPICAL COMPLIANCE

- REACH-SVHC Free : EU REACH Regulation(1907/2006) Substance of Very High Concern(SVHC)
- RoHS : RoHS Directive(2002/95/EC)Conformity
- Halogen Free : Chlorine Content : 900ppm or less Bromine Content : 900ppm or less Chlorine and Bromine Total Contents : 1500ppm or less
- TSCA : Premanufacture Notification(PMN) Conformity

GENERAL CO.,LTD. www.general.co.jp/english/

Tokyo Head Office: 1-3-6 Nishikanda, Chiyoda-ku, Tokyo 101-0065 Phone: +81-3-5283-8640


[China] Unit. C 3F, Zao-Fong Universe Building, No. 1800 Zhong Shan Xi Road, Shanghai, China Phone: +86 (0) 21 6440 1196

[Malaysia] Lot 4298-4300 Sg. Choh Industrial Area 48000 Rawang, Selangor, Malaysia Phone: +60-3-6099-9000

[USA] 601 N. Parkcenter Drive, Suite 106 Santa Ana, CA 92705 Phone: +1 657-236-7312

[Italy] Via Giacomo Leopardi, 29 20123 Milan Italy Phone: +39 2-4548-6203

SENSITIVITY

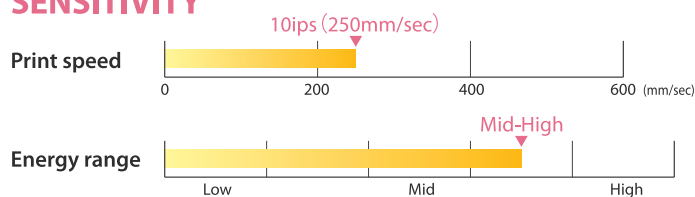

RESISTANCE

